



**Shurtape®**

**TRUE TO YOUR WORK®**

2019-2020

**INDUSTRIAL  
PRODUCT  
CATALOG**



## The Right Solution for Every Job.

That's what we have dedicated to crafting – and supplying – to you. Because our privately owned, fifth generation, global corporation is committed to designing, developing, manufacturing and delivering product solutions that make our customers' lives easier and help them do their jobs better.

Through our industry-leading Industrial Group, based in Hickory, NC, we deliver pressure-sensitive tapes for those with the highest, most exacting standards, and proudly serve a variety of markets, including packaging, building and construction, abatement, electrical, professional paint, stucco, HVAC, industrial, MRO, arts and entertainment, and transportation.

No matter the job, we know it's critical you're prepared. That's why we continue to deliver the tapes you trust – and the product features you demand – to deliver superior results.

# Shurtape

TECHNOLOGIES



In continuous operation since 1880, our company has a history of entrepreneurship and innovation, from spinning cotton, yarn and twine to our focus today: on making high-quality, high-performing tapes. Our success is built on passion – for our products, for complete customer satisfaction, and for the markets we serve. Here are just a few things we bring to the table:

### **Product Innovation**

We don't back down from a challenge. In fact, we embrace it. We listen. We solve. We develop the tools you need to get the job done right...the first time.

### **Global Footprint**

Our global manufacturing, distribution and service capabilities position us to satisfy the growing needs of an international audience searching for competitively priced, high-quality tape solutions, with international locations in:

Mexico | Peru | The United Kingdom  
Germany | The Middle East | Asia | Australia

### **Industry Knowledge**

We have also developed resources dedicated to keeping you up to date on industry trends and best practices – to help you exceed expectations on the job. Our educational website, [TapeUniversity.com](http://TapeUniversity.com), is your leading online resource for all things tape. We're committed to building the best learning experience by providing the tape industry's most comprehensive place to learn about the past, present and future trends on choosing and using tape. From blog posts and articles to video demonstrations, Tape University serves to answer the industry's most commonly asked questions about tape – and invites you to ask your own.

Want to learn more about our company, locations and brands?  
Visit us online at [ShurtapeTech.com](http://ShurtapeTech.com).



**OUR MISSION**  
**BE TRUE TO YOUR WORK**

<b>MASKING &amp; PAPER TAPES</b>	<b>2</b>
Painter's Tapes	4
General Purpose Masking Tapes	6
Performance Masking Tapes	7
Flatback Paper Tapes	8
Specialty Tapes	9
<b>PACKAGING SOLUTIONS</b>	<b>10</b>
Hot Melt Tapes	12
Specialty Hot Melt Tapes	13
Printed Hot Melt Tapes	14
Printable Hot Melt Tapes	14
Water-Based Acrylic Tapes	15
Water Activated Tapes	16
Strapping Tapes	17
Solvent-Based Acrylic Tapes	18
Office & Specialty Tapes	19
ShurSEAL® Packaging Solutions	20
Tape Applicators	22
<b>CLOTH &amp; DUCT TAPES</b>	<b>24</b>
General Purpose Duct Tapes	26
All-Purpose Duct Tapes	28
Abatement Duct Tapes	28
Stucco Duct Tapes	29
HVAC Duct Tapes	30
Heavy Duty Duct Tapes	32
Specialty Duct Tapes	33
Coated Cloth Tapes	34
Specialty Tapes	35
<b>FOIL, FILM &amp; FOAM TAPES</b>	<b>36</b>
Aluminum Foil Tapes	38
Electrical Tapes	40
Polyethylene/PVC Film Tapes	42
Composite Tapes	44
Specialty Tapes	45
<b>DOUBLE-COATED TAPES</b>	<b>46</b>
Double-Coated Paper Tapes	48
Double-Coated Film Tapes	49
Double-Coated Cloth Tapes	49
Transfer Adhesive Tapes	50
Dispenser	50
<b>PRODUCT INNOVATIONS</b>	<b>51</b>
<b>APPLICABLE STANDARDS</b>	<b>52</b>
<b>WARRANTY INFORMATION</b>	<b>52</b>
<b>PRODUCT INDEX</b>	<b>53</b>



# MASKING & PAPER TAPES



**WE KNOW** your time is valuable. That's why our masking and paper tapes are engineered to meet the demands of a range of jobs. Whether you require tensile strength, temperature resistance, removability, flexibility or professional paint lines, **SHURTAPE DELIVERS.**

## PAINTER'S TAPES

## CF 120



**FROGTAPE® MULTI-SURFACE  
MEDIUM ADHESION  
RUBBER-BASED ADHESIVE  
EXCLUSIVE PAINTBLOCK® TECHNOLOGY**

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
THICKNESS (MILS)	5.7
ELONGATION (%)	10
MAXIMUM SERVICE TEMPERATURE (°F)	-
APPLICABLE STANDARDS*	16

For interior or exterior use on multiple surfaces, including cured painted walls, wood trim, glass and metal; Withstands direct sunlight for up to 7 days.



## CF 160



**FROGTAPE® DELICATE SURFACE  
LOW ADHESION  
ACRYLIC-BASED ADHESIVE  
EXCLUSIVE PAINTBLOCK® TECHNOLOGY**

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	14
THICKNESS (MILS)	3.6
ELONGATION (%)	4.5
MAXIMUM SERVICE TEMPERATURE (°F)	-
APPLICABLE STANDARDS*	-

For interior use on freshly painted surfaces (24 hours old), faux finishes, primed wallboard and wallpaper.



## CP 130



**FROGTAPE® PRO GRADE  
MEDIUM ADHESION  
RUBBER-BASED ADHESIVE  
EXCLUSIVE PAINTBLOCK® TECHNOLOGY**

TENSILE (LBS/IN WIDTH)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32
THICKNESS (MILS)	5.5
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	200
APPLICABLE STANDARDS*	-

For interior or exterior use on multiple surfaces, including cured painted walls, wood trim, glass and metal.



## CP 27®



**PREMIUM GRADE, SHURRELEASE®  
MEDIUM ADHESION  
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32
THICKNESS (MILS)	5.5
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	200
APPLICABLE STANDARDS*	-

For interior and exterior use on multiple surfaces, including painted walls, glass, vinyl, metal and wood; Not recommended for use on wallpaper, unpainted wallboard, ceiling tile or with uncured coatings.



## CP 150



**PAINTER'S MATE GREEN®  
MEDIUM ADHESION  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
THICKNESS (MILS)	4.6
ELONGATION (%)	10
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	16

For interior use on painted walls, woodwork, glass, metal and vinyl.



## PAINTER'S TAPES

### COL 00



**PREMIUM GRADE, COLONIAL®  
HIGH ADHESION  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	39
THICKNESS (MILS)	6.4
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	200
APPLICABLE STANDARDS*	16

For industrial and automotive paint applications that do not require the use of a bake oven; Can also be used for general purpose masking applications that demand a premium performance tape.

### CP 66®



**CONTRACTOR GRADE  
HIGH ADHESION  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	38
THICKNESS (MILS)	5.2
ELONGATION (%)	10
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	16

For residential and commercial painting and construction, industrial masking, holding and packaging; Use in applications that demand quick stick and conformability to irregularly shaped surfaces.



### CP 102



**INDUSTRIAL GRADE  
MEDIUM-HIGH ADHESION  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32
THICKNESS (MILS)	5.4
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	200
APPLICABLE STANDARDS*	16

For the industrial, commercial and residential paint markets for use on vinyl, metal, glass, plastic and rubber.

### CP 107



**INDUSTRIAL GRADE  
MEDIUM-HIGH ADHESION  
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	18
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
THICKNESS (MILS)	4.8
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	16

For non-critical painting and industrial applications that demand good adhesion, quick stick and clean removal; Also used for general purpose packaging, bundling, holding, splicing and tabbing; For use on vinyl, glass, plastic and rubber.



CP 102

\* SEE PAGE 52 FOR APPLICABLE STANDARDS

## GENERAL PURPOSE MASKING TAPES

### CP 105



**GENERAL PURPOSE GRADE  
MEDIUM-HIGH ADHESION  
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	18
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	25
THICKNESS (MILS)	4.6
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	16

For non-critical bundling and labeling applications; Also used for general purpose packaging, holding and splicing applications for home, school and industry.

### CP 106



**GENERAL PURPOSE GRADE  
MEDIUM-HIGH ADHESION  
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	18
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
THICKNESS (MILS)	4.8
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	16

For packaging, bundling, holding, splicing, masking and labeling applications.

### CP 101



**GENERAL PURPOSE GRADE  
MEDIUM-HIGH ADHESION  
BLENDED RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	18
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	35
THICKNESS (MILS)	4.9
ELONGATION (%)	9.5
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	16

For bundling, packaging, holding, splicing, masking and labeling for home, school and industry.

### CP 83



**UTILITY GRADE  
HIGH ADHESION  
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	41
THICKNESS (MILS)	4.6
ELONGATION (%)	8
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	16

For general purpose packaging, bundling, holding, splicing, tabbing and banding applications involving a variety of substrates; Not recommended for exacting industrial masking, spray painting or oven baking applications.

### CP 631



**GENERAL PURPOSE GRADE  
MEDIUM-HIGH ADHESION  
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
THICKNESS (MILS)	4.5
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	5, 16

For general purpose labeling, color-coding, decorating and identification; Can also be used for packaging, bundling, binding, holding, splicing and banding applications.



CONFORMS TO  
ASTM D-4236



CP 105

## PERFORMANCE MASKING TAPES

### CP 400



**HIGH PERFORMANCE GRADE  
MODERATE TEMPERATURE  
MEDIUM-HIGH ADHESION  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	34
THICKNESS (MILS)	5.7
ELONGATION (%)	10
MAXIMUM SERVICE TEMPERATURE (°F)	200
APPLICABLE STANDARDS*	16

For moderate temperature paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry; Recommended for indoor use only.

### CP 450



**HIGH PERFORMANCE GRADE  
MODERATE TEMPERATURE  
MEDIUM-HIGH ADHESION  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	31
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	37
THICKNESS (MILS)	6.9
ELONGATION (%)	10
MAXIMUM SERVICE TEMPERATURE (°F)	225
APPLICABLE STANDARDS*	16

For moderate temperature, demanding paint masking applications in the transportation (auto, coaches, buses and marine) and metal fabrication industries; Also used for wet sanding applications; Recommended for indoor use only.

### CP 500



**HIGH PERFORMANCE GRADE  
HIGH TEMPERATURE  
MEDIUM-HIGH ADHESION  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	43
THICKNESS (MILS)	5.8
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	300
APPLICABLE STANDARDS*	16

For high temperature paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry; Also used for wet sanding applications; Recommended for indoor use only.

### CP 650



**HIGH PERFORMANCE GRADE  
HIGH TEMPERATURE  
MEDIUM-HIGH ADHESION  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	28
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	37
THICKNESS (MILS)	6.6
ELONGATION (%)	11
MAXIMUM SERVICE TEMPERATURE (°F)	325
APPLICABLE STANDARDS*	1, 16

For demanding, high temperature paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry; Also used for metal preparation, painting, coating and gel coat masking; Recommended for indoor use only.

### CF 740



**HIGH PERFORMANCE GRADE  
HIGH TEMPERATURE  
MEDIUM-HIGH ADHESION  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	39
THICKNESS (MILS)	6.3
ELONGATION (%)	11
MAXIMUM SERVICE TEMPERATURE (°F)	350
APPLICABLE STANDARDS*	16

For high temperature, demanding industrial paint masking applications in the transportation (auto, coaches, buses and marine) and metal fabrication industries; Also used for EPDM rubber insulation protection; Recommended for indoor use only.

### CP 905



**HIGH PERFORMANCE GRADE  
HIGH TEMPERATURE  
EXCELLENT ADHESION  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	41
THICKNESS (MILS)	6.4
ELONGATION (%)	11
MAXIMUM SERVICE TEMPERATURE (°F)	350
APPLICABLE STANDARDS*	16

For high temperature - up to 350 F - paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry; Recommended for indoor use only.

\* SEE PAGE 52 FOR APPLICABLE STANDARDS

## FLATBACK PAPER TAPES

### FP 115



**HIGH PERFORMANCE GRADE  
REINFORCED FLATBACK PAPER  
VERY HIGH ADHESION  
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	40
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	6.5
ELONGATION (%)	3
MAXIMUM SERVICE TEMPERATURE (°F)	120
APPLICABLE STANDARDS*	17

For industrial splicing, start-up, tabbing, shingling and overlapping applications; Effectively secures the paper to the core during roll start-up, holds the splice during processing and anchors the end of the roll securely.



FP 115

### FP 97



**GENERAL PURPOSE GRADE  
KRAFT FLATBACK PAPER  
VERY HIGH ADHESION  
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	35
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	110
THICKNESS (MILS)	6.0
ELONGATION (%)	6
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	17, 28, 29, 30, 31

For hand and machine carton sealing; Used for splicing various substrates; Also used for general purpose packaging, binding, holding, tabbing, reinforcing, banding, patching and floor seaming applications; FDA compliant.

### FP 96



**PACKAGING GRADE  
KRAFT FLATBACK PAPER  
VERY HIGH ADHESION  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	36
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	90
THICKNESS (MILS)	6.1
ELONGATION (%)	6
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	17

For hand and machine carton sealing; Used for splicing various substrates; Also used for general purpose packaging, binding, holding, tabbing, reinforcing, banding and patching applications.

### FP 202



**PACKAGING PREMIUM GRADE  
HEAVY DUTY, BLEACHED KRAFT PAPER  
VERY HIGH ADHESION  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	55
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	63
THICKNESS (MILS)	7.5
ELONGATION (%)	3
MAXIMUM SERVICE TEMPERATURE (°F)	180
APPLICABLE STANDARDS*	14, 17

For splicing various substrates; Used for heavy duty hand and machine carton sealing applications; Used for general purpose applications where a thick, flatback paper tape is required.

## FLATBACK PAPER TAPES

### FP 17



**PRINTABLE, LOW TEMPERATURE  
HIGH ADHESION  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	52
THICKNESS (MILS)	5.4
ELONGATION (%)	3
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	17

For general purpose packaging, bundling, holding, binding, splicing, labeling, color-coding, banding, decorating and identification.

### FP 227



**PRINTABLE  
HIGH ADHESION  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	57
THICKNESS (MILS)	5.8
ELONGATION (%)	2.5
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	5, 17

For full-web flexographic printing equipment or hand-labeling applications.

\*\*Fluorescent colors do not conform to ASTM D-4236



### FP 726



**PRINTABLE, HIGH-STRENGTH  
HIGH ADHESION  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	45
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	72
THICKNESS (MILS)	6.6
ELONGATION (%)	3
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	5, 17

For identification labeling, color-coding, packaging closure and other applications where printing is necessary.



## SPECIALTY TAPES

### CP 743



**SPECIALTY GRADE  
PHOTOGRAPHIC BLACK  
VERY HIGH ADHESION  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	47
THICKNESS (MILS)	6.5
ELONGATION (%)	8
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	16

For use in photo studios, film processing labs and home darkrooms; Recommended for use as a chart tape; Used for quality photographic reproduction work, including cropping and edging negatives for contact printing; Also used for sealing camera bellows and film holders against light leaks.

### CP 327



**PREMIUM GRADE  
MULTI-SURFACE CONTAINMENT TAPE  
EXCELLENT ADHESION  
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32
THICKNESS (MILS)	5.5
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	200
APPLICABLE STANDARDS*	-

For building containments in restoration, remodeling, remediation and abatement jobs; Can be used on interior and exterior walls, glass, vinyl, metal and wood.



CP 327

\* SEE PAGE 52 FOR APPLICABLE STANDARDS



# PACKAGING SOLUTIONS



ShurSEALSecure.com 1.800.442.4422



**WE KNOW** every sealing situation is unique. And we understand that keeping your lines running at peak production, while producing a better, more reliable case seal is a priority. That's why we take a holistic approach in the development of our tape and tape application technologies to deliver solutions that are purpose-built for your packaging and case sealing operations. No matter the application, we deliver **SECURE SEALS, EVERY TIME.**

## HOT MELT TAPES

## HP 100®


**GENERAL PURPOSE GRADE  
25 MICRON CAST BOPP FILM  
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	43
HOLDING POWER TO FIBERBOARD (MINUTES)	10,000
THICKNESS (MILS)	1.6
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	22, 29, 32

For manual or automated industrial carton sealing of lightweight cartons with minimal exposure to handling, shipping and load stress.



## HP 200®


**PRODUCTION GRADE  
30 MICRON CAST BOPP FILM  
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	44
HOLDING POWER TO FIBERBOARD (MINUTES)	15,000
THICKNESS (MILS) (MACHINE LENGTH)	1.9
THICKNESS (MILS) (HAND LENGTH)	1.8
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 22, 29, 32

For manual or automated industrial carton sealing of medium-weight cartons in normal manufacturing and shipping environments.



## HP 300®


**PERFORMANCE GRADE  
35 MICRON CAST BOPP FILM  
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
HOLDING POWER TO FIBERBOARD (MINUTES)	25,000
THICKNESS (MILS)	2.2
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 22, 29, 32

For manual or automated industrial carton sealing of medium-weight cartons that are subjected to increased handling stress.



## HP 400®


**HIGH PERFORMANCE GRADE  
40 MICRON CAST BOPP FILM  
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	33
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	54
HOLDING POWER TO FIBERBOARD (MINUTES)	35,000
THICKNESS (MILS)	2.5
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 22, 29, 32

For manual or automated industrial carton sealing of large, bulky or heavy content cartons; For use in higher speed, critical closure applications; Can be used in moderate to severe handling environments.



## HP 500®


**HEAVY DUTY GRADE  
50 MICRON CAST BOPP FILM  
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	42
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	58
HOLDING POWER TO FIBERBOARD (MINUTES)	45,000
THICKNESS (MILS)	3.0
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 12, 22, 29, 32

For manual or automated industrial carton sealing of heavy, critical closure cartons, including overstuffed or under-filled cartons, in high stress and extreme handling conditions.



## HP 800


**HEAVY DUTY GRADE  
50 MICRON POLYESTER FILM  
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	54
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	95
HOLDING POWER TO FIBERBOARD (MINUTES)	45,000
THICKNESS (MILS)	3.4
ELONGATION (%)	130
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 10, 11, 22, 29, 33

For manual or automated industrial carton sealing of heavy duty, critical closure cartons, including military supplies, high-value electronic components and hazardous materials and chemicals.



## SPECIALTY HOT MELT TAPES

### HP 132®



**COLD ENVIRONMENT  
GENERAL PURPOSE GRADE  
25 MICRON CAST BOPP FILM  
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
HOLDING POWER TO FIBERBOARD (MINUTES)	10,000
THICKNESS (MILS)	1.6
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 75
SERVICE TEMPERATURE RANGE (°F)	-20 - 100
APPLICABLE STANDARDS*	22, 29, 32

For manual or automated industrial sealing of lightweight cartons in cold temperature environments such as food processing and packaging facilities, as well as in cold weather moving/storage and unheated warehouses.



### HP 232®



**COLD ENVIRONMENT  
PRODUCTION GRADE  
30 MICRON CAST BOPP FILM  
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
HOLDING POWER TO FIBERBOARD (MINUTES)	10,000
THICKNESS (MILS)	1.9
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 75
SERVICE TEMPERATURE RANGE (°F)	-20 - 100
APPLICABLE STANDARDS*	22, 29, 32

For manual or automated industrial sealing of medium-weight cartons in cold temperature environments such as food processing and packaging facilities, as well as in cold weather moving/storage and unheated warehouses.



### HP 235



**RECYCLED CARTONS  
PRODUCTION GRADE  
30 MICRON CAST BOPP FILM  
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
HOLDING POWER TO FIBERBOARD (MINUTES)	15,000
THICKNESS (MILS)	2.0
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 22, 29, 32

For manual and automated industrial sealing of medium-weight, highly recycled cartons, particularly 100 percent recycled.



FE-2\* & HP 200®

\* SEE PAGE 21

## PRINTED HOT MELT TAPES

### HP 240



#### PRODUCTION GRADE STANDARD MESSAGE PRINT 30 MICRON CAST BOPP FILM SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	44
HOLDING POWER TO FIBERBOARD (MINUTES)	15,000
THICKNESS (MILS)	1.9
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 22, 29, 32

Printed with standard messages to prevent pilferage or inform handlers of care; For manual or automated industrial carton sealing of medium-weight cartons in normal manufacturing and shipping environments.

\*Keep Refrigerated and Keep Frozen available as HP 242 cold environment packaging tape.



### CUSTOM PRINT



#### 25-50 MICRON CAST BOPP FILM SYNTHETIC HOT MELT ADHESIVE

Custom-printed to prevent pilferage and allow personalization of outgoing cartons; For manual or automated industrial carton sealing of lightweight to heavy, bulky cartons in minimal to high stress and extreme handling conditions.

Available in a variety grades, including HP 150, HP 250, HP 350, HP 450, HP 550 and HP 850.

Visit [Shurtape.com](http://Shurtape.com) or contact your Shurtape Sales Representative for more details.



## PRINTABLE HOT MELT TAPES

### HP 260



#### PRODUCTION GRADE 30 MICRON CAST BOPP FILM SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	44
HOLDING POWER TO FIBERBOARD (MINUTES)	15,000
THICKNESS (MILS)	1.9
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 22, 29, 32

For use on Siat L33, L36, L233 (or equivalent) surface printing presses; For manual sealing of medium-weight cartons in normal manufacturing and shipping environments; May also be used in automated industrial carton sealing applications.



### HP 560



#### HEAVY DUTY GRADE 50 MICRON CAST BOPP FILM SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	42
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	58
HOLDING POWER TO FIBERBOARD (MINUTES)	45,000
THICKNESS (MILS)	3.0
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 12, 22, 29, 32

For use on Siat L33, L36, L233 (or equivalent) surface printing presses; For manual or automated industrial carton sealing of heavy, bulky cartons, including overstuffed or under-filled cartons, in high stress and extreme handling conditions.



### HP 460



#### HIGH PERFORMANCE GRADE 40 MICRON CAST BOPP FILM SYNTHETIC HOT MELT ADHESIVE

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	33
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	54
HOLDING POWER TO FIBERBOARD (MINUTES)	35,000
THICKNESS (MILS)	2.5
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 22, 29, 32

For use on Siat L33, L36, L233 (or equivalent) surface printing presses; For manual or automated industrial carton sealing of large, bulky or heavy content cartons; For use in higher speed, critical closure applications; For use in moderate to severe handling environments.



### GS 496



#### PRODUCTION GRADE CAST BOPP FILM SYNTHETIC HOT MELT ADHESIVE FIBERGLASS REINFORCED

TENSILE (LBS/IN WIDTH)	100
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	4.3
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	29, 32

For use on Siat L33, L36, L233 (or equivalent) surface printing presses; For general purpose strapping, packaging, bundling and palletizing applications.



## WATER-BASED ACRYLIC TAPES

### AP 101®



**GENERAL PURPOSE GRADE  
25 MICRON CAST BOPP FILM  
EMULSION ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	18
<b>THICKNESS (MILS)</b>	<b>1.6</b>
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	29, 32

For closure of lightweight cartons in manual and automated industrial sealing settings.



### AP 180®



**PRODUCTION GRADE  
25 MICRON CAST BOPP FILM  
EMULSION ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	21
<b>THICKNESS (MILS)</b>	<b>1.8</b>
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	29, 32

For manual and automated industrial sealing of lightweight cartons.



### AP 201®



**PRODUCTION GRADE  
28 MICRON CAST BOPP FILM  
EMULSION ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	22
<b>THICKNESS (MILS)</b>	<b>2.0</b>
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	29, 32

For manual and automated industrial sealing of light- to medium-weight cartons.



### AP 301®



**PERFORMANCE GRADE  
35 MICRON CAST BOPP FILM  
EMULSION ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	25
<b>THICKNESS (MILS)</b>	<b>2.2</b>
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	29, 32

For manual and automated industrial sealing of medium-weight cartons in extreme temperature environments or subjected to handling stress.



### AP 401®



**HIGH PERFORMANCE GRADE  
40 MICRON CAST BOPP FILM  
EMULSION ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	27
<b>THICKNESS (MILS)</b>	<b>2.5</b>
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	29, 32

For heavy duty manual and automated industrial sealing of cartons exposed to extreme temperatures, rough handling and load stress; Also used for critical closure of bulky packages.



**SD 932\* & AP SERIES**  
\* SEE PAGE 22

## WATER ACTIVATED TAPES

### GP 100



#### MEDIUM DUTY GRADE NON-REINFORCED KRAFT PAPER WATER ACTIVATED ADHESIVE

PAPER SHEET (LBS)	60
MD TENSILE (LBS/IN WIDTH)	45
CD TENSILE (LBS/IN WIDTH)	23
APPLICABLE STANDARDS*	-

For light- to medium-weight packaging applications such as inner carton sealing or palletized loads.

### WP 100



#### ECONOMY GRADE REINFORCED KRAFT PAPER (MD) H110/(CD) G150 FIBERGLASS WATER ACTIVATED ADHESIVE

MD TENSILE (LBS/IN WIDTH)	55
CD TENSILE (LBS/IN WIDTH)	25
TOP SHEET (LBS)	23
BOTTOM SHEET (LBS)	23
MD PATTERN	1-1-1-1-1
MD SPACING (IN)	5/8
CD SPACING (IN)	1.25
APPLICABLE STANDARDS*	-

For sealing light- to medium-weight cartons up to 25 lbs with normal exposure to handling, shipping and load stress.

### WP 200



#### PRODUCTION GRADE REINFORCED KRAFT PAPER (MD) G75/(CD) G150 FIBERGLASS WATER ACTIVATED ADHESIVE

MD TENSILE (LBS/IN WIDTH)	60
CD TENSILE (LBS/IN WIDTH)	27
TOP SHEET (LBS)	23
BOTTOM SHEET (LBS)	23
MD PATTERN	1-1-1-1-1
MD SPACING (IN)	1/2
CD SPACING (IN)	1.25
APPLICABLE STANDARDS*	-

For sealing medium-weight cartons up to 35 lbs in normal manufacturing and shipping environments; Ideal for single parcel shipments.

### WP 300



#### HEAVY DUTY GRADE REINFORCED KRAFT PAPER (MD) G75/(CD) G150 FIBERGLASS WATER ACTIVATED ADHESIVE

MD TENSILE (LBS/IN WIDTH)	75
CD TENSILE (LBS/IN WIDTH)	30
TOP SHEET (LBS)	23
BOTTOM SHEET (LBS)	23
MD PATTERN	2-1-1-1-1-2
MD SPACING (IN)	7/16
CD SPACING (IN)	1.25
APPLICABLE STANDARDS*	9

For critical closure of heavy-weight cartons up to 45 lbs in all environments; Ideal for single parcel shipments.

### WP 400



#### EXTRA HEAVY DUTY GRADE REINFORCED KRAFT PAPER (MD) G75/(CD) G150 FIBERGLASS WATER ACTIVATED ADHESIVE

MD TENSILE (LBS/IN WIDTH)	80
CD TENSILE (LBS/IN WIDTH)	35
TOP SHEET (LBS)	23
BOTTOM SHEET (LBS)	30
MD PATTERN	2-2-1-2-2
MD SPACING (IN)	19/32
CD SPACING (IN)	0.75
APPLICABLE STANDARDS*	9

For sealing large, bulky or heavy content cartons over 50 lbs in moderate to severe handling environments; Ideal for single parcel shipments.

### CUSTOM PRINT



#### REINFORCED KRAFT PAPER WATER ACTIVATED ADHESIVE

For sealing lightweight to large, bulky or heavy cartons in normal to severe handling environments; Ideal for single parcel shipments; Custom printed with logo or message for delivery of goods without pilferage.

Available in a variety grades, including WP 150, WP 250, WP 350 and WP 450.

Visit [Shurtape.com](http://Shurtape.com) or contact your Shurtape Sales Representative for more details.

# STRAPPING TAPES

## GS 490



**ECONOMY GRADE  
CAST BOPP FILM  
SYNTHETIC HOT MELT ADHESIVE  
FIBERGLASS REINFORCED**

TENSILE (LBS/IN WIDTH)	100
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	4.5
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	29, 32

For light duty strapping, packaging, bundling and palletizing applications.



## GS 500



**UTILITY GRADE  
CAST BOPP FILM  
SYNTHETIC HOT MELT ADHESIVE  
FIBERGLASS REINFORCED**

TENSILE (LBS/IN WIDTH)	150
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	5.2
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	29, 32

For general purpose strapping, packaging, bundling and palletizing jobs.



## GS 501



**INDUSTRIAL GRADE  
CAST BOPP FILM  
SYNTHETIC HOT MELT ADHESIVE  
FIBERGLASS REINFORCED**

TENSILE (LBS/IN WIDTH)	175
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	5.4
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	29, 32

For medium duty strapping, packaging, bundling and palletizing applications.



## GS 521



**HIGH PERFORMANCE GRADE  
CAST BOPP FILM  
SYNTHETIC HOT MELT ADHESIVE  
FIBERGLASS REINFORCED**

TENSILE (LBS/IN WIDTH)	300
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	6.3
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	8, 29, 32

For heavy duty closing, strapping, packaging, bundling, unitizing, palletizing and L-Clip applications.



## GS 531



**PREMIUM GRADE  
POLYESTER FILM (PET)  
SYNTHETIC HOT MELT ADHESIVE  
FIBERGLASS REINFORCED**

TENSILE (LBS/IN WIDTH)	300
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	6.7
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	8, 29, 32

For heavy duty, maximum security closing, strapping, packaging, protecting, bundling, reinforcing, sealing, unitizing, palletizing and L-Clip applications.



## PS 748



**UTILITY GRADE  
TENSILIZED, MOPP FILM  
EMULSION ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	100
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	34
THICKNESS (MILS)	2.8
ELONGATION (%)	30
SERVICE TEMPERATURE RANGE (°F)	0 - 250
APPLICABLE STANDARDS*	-

For light duty strapping, packaging, bundling and palletizing applications.

\* SEE PAGE 52 FOR APPLICABLE STANDARDS

## SOLVENT-BASED ACRYLIC TAPES

### PP 802



#### PREMIUM PLUS GRADE 25 MICRON CAST BOPP FILM SOLVENT-BASED ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	25
THICKNESS (MILS)	2.0
ELONGATION (%)	140
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	22

For light to medium duty sealing, repairing and bundling of corrugated cartons, paper and film containers; Use with a hand-held or machine dispenser.

### PP 803



#### PREMIUM PLUS GRADE 30 MICRON CAST BOPP FILM SOLVENT-BASED ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	25
THICKNESS (MILS)	2.2
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	22

For overlamination, label protection and carton closure applications that demand 100 percent clarity; For use in a broad range of temperatures.

### PP 810



#### PREMIUM GRADE 25 MICRON CAST BOPP FILM SOLVENT-BASED ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	22
THICKNESS (MILS)	1.8
ELONGATION (%)	140
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	22

For sealing light- to medium-weight cartons in everyday shipping and handling environments; Also used for bundling and securing loose objects; Can also be used to repair corrugated cartons, paper and film containers; Use with a hand-held dispenser.

### PP 815



#### HEAVY DUTY GRADE 40 MICRON CAST BOPP FILM SOLVENT-BASED ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	28
THICKNESS (MILS)	2.6
ELONGATION (%)	140
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	22

For critical sealing and repairing of corrugated containers in hot and cold environments; Use with a hand-held dispenser.



SD 935\* & PP SERIES

\* SEE PAGE 22

## OFFICE & SPECIALTY TAPES

### CT 109



**GENERAL PURPOSE GRADE  
CELLULOSE FILM  
STATIC-FREE  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	35
<b>THICKNESS (MILS)</b>	<b>1.7</b>
ELONGATION (%)	18
MAXIMUM SERVICE TEMPERATURE (°F)	265
APPLICABLE STANDARDS*	20

Hand-tearable for sealing, packaging and mending applications, particularly involving hard-to-stick-to surfaces; Also used for splicing applications.

### VF 719



**ECONOMY GRADE  
UPVC FILM  
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	13
<b>THICKNESS (MILS)</b>	<b>1.9</b>
ELONGATION (%)	60
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	24

For use with a hand dispenser to seal cartons with recycled fiber content, heavy ink coverage or rough surfaces.

### AP 15



**SHIPPING GRADE  
25 MICRON CAST BOPP FILM  
EMULSION ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	19
<b>THICKNESS (MILS)</b>	<b>1.6</b>
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	29, 32

For protecting shipping labels and other printed surfaces against weather and handling.



### JLAR



**SPECIALTY GRADE  
BOPP FILM  
SOLVENT-BASED ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
<b>THICKNESS (MILS)</b>	<b>2.6</b>
ELONGATION (%)	140
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	-

For overlamination and label protection applications that demand a clear to the core tape; Also used for light duty packaging, paper and book repair and mending, and holding applications; Recommended for use with counter and desk dispensers.

### PP 808



**GENERAL PURPOSE GRADE  
UPVC FILM  
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	24
<b>THICKNESS (MILS)</b>	<b>2.1</b>
ELONGATION (%)	60
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	-

For lightweight bag sealing, banding, bundling and packaging applications; Also used for color-coding tasks.

### PP 807



**PREMIUM GRADE  
25 MICRON CAST BOPP FILM  
SOLVENT-BASED ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	23
<b>THICKNESS (MILS)</b>	<b>1.8</b>
ELONGATION (%)	140
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	-

For moisture-proof protection of labels and handling instructions; Also used for industrial and production laminating, joining, covering and protecting jobs.

\* SEE PAGE 52 FOR APPLICABLE STANDARDS



# ShurSEAL® PACKAGING SOLUTIONS

At Shurtape, we've taken a holistic approach to case sealing and developed strategic partnerships to offer packaging tapes and tape application technologies that together deliver better carton seals and packaging line efficiency. The result is ShurSEAL Packaging Solutions, manual and automated case sealing systems that combine HP Series packaging tape with PrimeLoc™ tape applicators to enhance your case sealing operations.

- Reduce material waste
- Reduce downtime
- Increase safety
- Increase content security
- Reduce maintenance costs

Learn more at  
[ShurSEALSecure.com](https://ShurSEALSecure.com)

## FOLDED EDGE® TECHNOLOGY

A patented feature on the tape applicator that folds the edges of the tape as it's applied, reinforcing seal strength and creating a ready to open seal that doesn't require a knife.

- More reliable tape application results in better production throughput
- Increased seal strength at major flaps for added security
- Easy, no-knife opening reduces risk of product damage and worker injury



## 7000 SERIES



### 7000 Series Tape Applicators feature

- Easy retrofit into existing erectors and sealers
- Stainless steel wash-down ready construction
- Open design for easy threading
- Front and rear tape tab adjustments
- Good to the Core® tape for less material waste
- Consistent seals at speeds up to 200 fpm
- Multiple wipe-down points for full use of the tape's adhesive
- Available with PrimeAlert™ Tape Monitoring System
- Folded Edge Technology also available

## 8000 SERIES (QUICK CHANGE)



**8000 Series Quick Change Sealing System** is uniquely engineered to tackle the downtime associated with slow tape roll changeovers, while offering all the benefits of the 7000 Series Applicators.

- Tape roll changes in less than 10 seconds
- Interchangeable inserts allow for easy offline threading
- Lightweight inserts reduce operator strain and lifting
- Retrofits to existing erectors and sealers
- Available with PrimeAlert™ Tape Monitoring System
- Folded Edge Technology also available

## FOLDED EDGE® HAND DISPENSERS



### Folded Edge Hand Dispensers feature

- Improved wipe-down force for tamper-evident seals
- Retractable/pivoting safety blade
- Visible tape length indicators for tab length control
- Visible markers for single-strip, straight taping guidance
- Durable, heavy duty design for long-lasting performance
- Available in 2-inch (FE-2) and 3-inch (FE-3) models

## MANUAL APPLICATORS



## FT 36



**PATENTED PISTOL-GRIP  
FILAMENT TAPE DISPENSER  
18, 24, & 36-MM WIDTH USE\***

For manual packaging, L-Clipping, strapping, bundling and palletizing applications.

**RECOMMENDED PRODUCTS**

GS Series

\*Available in 48-MM and 72-MM upon request. Contact your Shurtape Sales Representative for more information.

FT 36 & GS SERIES

## SD 932



**STANDARD GRADE  
PISTOL-GRIP TAPE DISPENSER  
WITH ANTI-REVERSE BAR  
2-IN WIDTH USE**

For manual carton sealing applications.

**RECOMMENDED PRODUCTS**

AP Series, HP Series, PP Series, FP 96, FP 97, FP 202, VF 719

## SD 934 &amp; SD 935



**PROFESSIONAL GRADE  
PISTOL-GRIP TAPE DISPENSER  
HIGH-IMPACT HANDLE, METAL FRAME  
2 OR 3-IN WIDTH USE**

For manual carton sealing applications.

**RECOMMENDED PRODUCTS**

AP Series, HP Series, PP Series, FP 96, FP 97, FP 202, VF 719

## SD 936



**DELUXE SILENCER  
PISTOL-GRIP TAPE DISPENSER  
HIGH-IMPACT HANDLE, METAL FRAME  
2-IN WIDTH USE**

For manual carton sealing applications.

**RECOMMENDED PRODUCTS**

AP Series, HP Series, PP Series, FP 96, FP 97, FP 202, VF 719

## MANUAL APPLICATORS

**SD 999**



**FILAMENT TAPE DISPENSER  
METAL-FRAMED  
1-IN WIDTH USE**

For manual closing, strapping, packaging, bundling and palletizing applications.

**RECOMMENDED PRODUCTS**

GS Series, PS Series

**SD 930**



**ECONOMY GRADE  
CLAMSHELL TAPE DISPENSER  
HIGH-IMPACT PLASTIC  
2-IN WIDTH USE**

For manual packaging applications.

**RECOMMENDED PRODUCTS**

AP Series, HP Series, PP Series, FP 96, FP 97, FP 202, VF 719

**SD 931**



**LABEL PROTECTION DISPENSER  
HIGH-IMPACT PLASTIC  
4-IN WIDTH USE**

For use on packing lists, sales slips and labels.

**RECOMMENDED PRODUCTS**

AP 15, PP 807



**SD 937**



**BAG-SEALING DISPENSER  
METAL-FRAMED  
9-MM WIDTH USE**

For single-stroke bag sealing applications.

**RECOMMENDED PRODUCTS**

PP 808

**SD 955**



**DESKTOP TAPE DISPENSER  
HIGH-IMPACT PLASTIC  
1-IN WIDTH USE**

For mending and light duty splicing tasks. Use with tapes with a 1-in or 3-in inside diameter core.

**RECOMMENDED PRODUCTS**

CT 109

**E-1**



**ELECTRONIC GUMMED TAPE DISPENSER  
RUGGED CONSTRUCTION  
ONE-TOUCH PRESET LENGTHS  
1.5 TO 3-IN WIDTH USE**

Used to feed, moisten and cut water activated tape to desired measurement in case sealing applications.

**RECOMMENDED PRODUCTS**

WP Series

**M-1**



**MANUAL GUMMED TAPE DISPENSER  
STEEL CONSTRUCTION  
BAKED ENAMEL FINISH  
1.5 TO 3-IN WIDTH USE**

Used to feed, moisten and cut water activated tape to desired measurement in case sealing applications.

**RECOMMENDED PRODUCTS**

WP Series

**SP 5000**



**RETROFIT TAPE HEAD  
POWDER COATED STEEL  
LEFT OR RIGHT HAND  
2 OR 3-IN MODELS AVAILABLE**

For industrial automated carton sealing applications; Retrofits into most common case erecting and sealing equipment.

**RECOMMENDED PRODUCTS**

HP Series and AP Series machine rolls



# CLOTH & DUCT TAPES



**WE KNOW** all jobs have one thing in common: they must be done right. That's why our complete line of cloth and duct tapes is engineered to exacting specs. When easy handling, varying adhesion levels and durable construction characteristics are needed, trust Shurtape to give every job a distinctive mark of **EXCELLENCE**.

# GENERAL PURPOSE DUCT TAPES

## PC 6



**ECONOMY GRADE**  
**GOOD CONFORMABILITY**  
**NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
<b>THICKNESS (MILS)</b>	<b>6.0</b>
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	-

For non-critical, general purpose use in packaging, bundling, sealing, repairing, holding and waterproofing; Also used in the remediation/abatement industry as a gooseneck tape.



## PC 7



**UTILITY GRADE**  
**GOOD SHEAR AND ADHESION**  
**NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
<b>THICKNESS (MILS)</b>	<b>7.0</b>
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	52

For utility grade sealing, seaming, repairing, holding and waterproofing applications that require aggressive stick and superior hold; For temporary or permanent use.



For ultimate performance, choose Shurtape duct tapes with Polybonded CO-EX Technology®. The co-extrusion process melds polyethylene, cloth and adhesive in a single, high temperature step, resulting in a permanent, airtight bond. This seamless construction creates added strength and will not delaminate.



PC 7

## PC 8



**GENERAL PURPOSE**  
**GOOD SHEAR AND ADHESION**  
**NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
<b>THICKNESS (MILS)</b>	<b>8.0</b>
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	52

For general purpose sealing, seaming, repairing, holding and waterproofing applications that require aggressive stick and superior hold; Also used in the restoration industry; For temporary or permanent use.



## PC 9



**CONTRACTOR GRADE**  
**EXCELLENT SHEAR AND ADHESION**  
**NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
<b>THICKNESS (MILS)</b>	<b>9.0</b>
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	35 - 200
APPLICABLE STANDARDS*	52

For contractor grade sealing, seaming, repairing, holding and waterproofing applications that require aggressive stick and superior hold; Also used in the restoration industry; For temporary or permanent use.



## PC 600S



### CONTRACTOR GRADE CONFORMABLE NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS (MILS)	9.0
ELONGATION (%)	17
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	5

For general purpose use in industrial, carpet, plumbing, HVAC, sealing, waterproofing, patching, remediation and restoration applications.



## PC 600C



### CONTRACTOR GRADE CONFORMABLE NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS (MILS)	9.0
ELONGATION (%)	17
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	-

For general purpose use in industrial, plumbing, carpet, color-coding and splicing applications, as well as home and general repair applications, particularly where a discreet fix is needed.



## ALL-PURPOSE DUCT TAPES

## PC 618S



**PERFORMANCE GRADE  
EXCELLENT CONFORMABILITY  
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
<b>THICKNESS (MILS)</b>	<b>10.0</b>
ELONGATION (%)	17
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	41, 52

For holding, securing, seaming, repairing, bundling, splicing, packaging and masking in HVAC, industrial, commercial, utilities, trucking and automotive applications; Can also be used as a condensation barrier in appliance assemblies.



## PC 618C



**PERFORMANCE GRADE  
EXCELLENT CONFORMABILITY  
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
<b>THICKNESS (MILS)</b>	<b>10.0</b>
ELONGATION (%)	17
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	41, 52

For holding, securing, seaming, repairing, bundling, splicing, packaging and masking in HVAC, industrial, commercial, utilities, trucking and automotive applications; Can also be used as a condensation barrier in appliance assemblies.



## PC 619



**SPECIALTY GRADE  
CONFORMABLE  
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
<b>THICKNESS (MILS)</b>	<b>9.0</b>
ELONGATION (%)	17
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	5

For general use, including color-coding, labeling, floor marking and book-binding; Also used for stage preparation in the motion picture and audio/visual industries; Can also be used for a variety of applications in the hospitality, motorsports and floral industries.



## ABATEMENT DUCT TAPES

## PC 608



**CONTRACTOR GRADE ABATEMENT  
EXCELLENT HOLD  
BLENDED RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
<b>THICKNESS (MILS)</b>	<b>9.0</b>
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	35 - 200
APPLICABLE STANDARDS*	34, 52

For use when building containments and a variety of other applications in remediation, restoration and abatement jobs; Can be used for mold and asbestos removal.



CP 327 &amp; PC 608



PC 667

## STUCCO DUCT TAPES

**PC 622**



**PREMIUM GRADE, CLOTH DUCT  
CONFORMABLE WITH EXCELLENT HOLD  
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	45
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	54
<b>THICKNESS (MILS)</b>	<b>12.5</b>
ELONGATION (%)	11
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	39, 52

For protecting window and door frames during stucco applications; Used in high performance motorsports; For heavy duty bundling, holding and splicing.

**PC 667**



**SPECIALTY GRADE, CLOTH DUCT  
EASY TO TEAR  
BLENDED RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
<b>THICKNESS (MILS)</b>	<b>9.0</b>
ELONGATION (%)	23
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	-

For protective masking of non-painted surfaces, including steel, vinyl, aluminum and anodized metals; Use in plastering, stucco, concrete, pool and tile applications.



\* SEE PAGE 52 FOR APPLICABLE STANDARDS

## HVAC DUCT TAPES

**PC 857**

**UL PRINTED COATED CLOTH  
HIGH STRENGTH AND HOLD  
SYNTHETIC RUBBER BLEND ADHESIVE**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
<b>THICKNESS (MILS)</b>	<b>14.0</b>
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	50 - 212
APPLICABLE STANDARDS*	42, 51, 52, 53

Used in the HVAC industry to seal, seam and join Class 1 Flex Duct.

**PC 858CA**

**UL PRINTED COATED CLOTH  
HIGH STRENGTH AND HOLD  
SYNTHETIC RUBBER BLEND ADHESIVE  
CEC APPROVED**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
<b>THICKNESS (MILS)</b>	<b>14.0</b>
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	50 - 212
APPLICABLE STANDARDS*	42, 51, 52, 53

Used in the HVAC industry to seal, seam and join Class 1 Flex Duct; Approved for use by the California Energy Commission.

**PC 609**

**PERFORMANCE GRADE  
EXCELLENT HOLD  
BLENDED RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	62
<b>THICKNESS (MILS)</b>	<b>10.0</b>
ELONGATION (%)	23
SERVICE TEMPERATURE RANGE (°F)	25 - 200
APPLICABLE STANDARDS*	34, 52

For use in the HVAC industry to repair thermal insulation and seal metal ductwork; Used in the manufactured housing industry to seam bottom boards and for patching, seaming and sealing; Used for packaging, bundling, holding, wrapping and waterproofing; Also used for asbestos and mold remediation.



**SF 682**



**SHURFLEX® PROFESSIONAL GRADE FLEXIBLE AND CONFORMABLE NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
<b>THICKNESS (MILS)</b>	<b>10.0</b>
ELONGATION (%)	18
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	35, 52

For use in the HVAC industry for airtight and moisture-free seaming, connecting, splicing, patching and sealing of sheet metal and flex duct, rigid ductboards, air vents, insulation, fibrous filter banks and pollution collection systems.



**SF 683**



**SHURFLEX® PROFESSIONAL GRADE FLEXIBLE AND CONFORMABLE NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
<b>THICKNESS (MILS)</b>	<b>10.0</b>
ELONGATION (%)	18
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	35, 52

For use in the HVAC industry for airtight and moisture-free seaming, connecting, splicing, patching and sealing of sheet metal and flex duct, insulation, rigid ductboards, air vents and fiberboard.




**MJ 100**



**PROFESSIONAL GRADE FIBERGLASS MESH WATER-BASED ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	75.5
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	8
<b>THICKNESS (MILS)</b>	<b>9.0</b>
ELONGATION (%)	3.83
SERVICE TEMPERATURE RANGE (°F)	-
APPLICABLE STANDARDS*	-

For reinforcing joints, seams and connections when paint-on mastic is used in HVAC applications; Can also be applied to drywall seams before the application of joint compound.

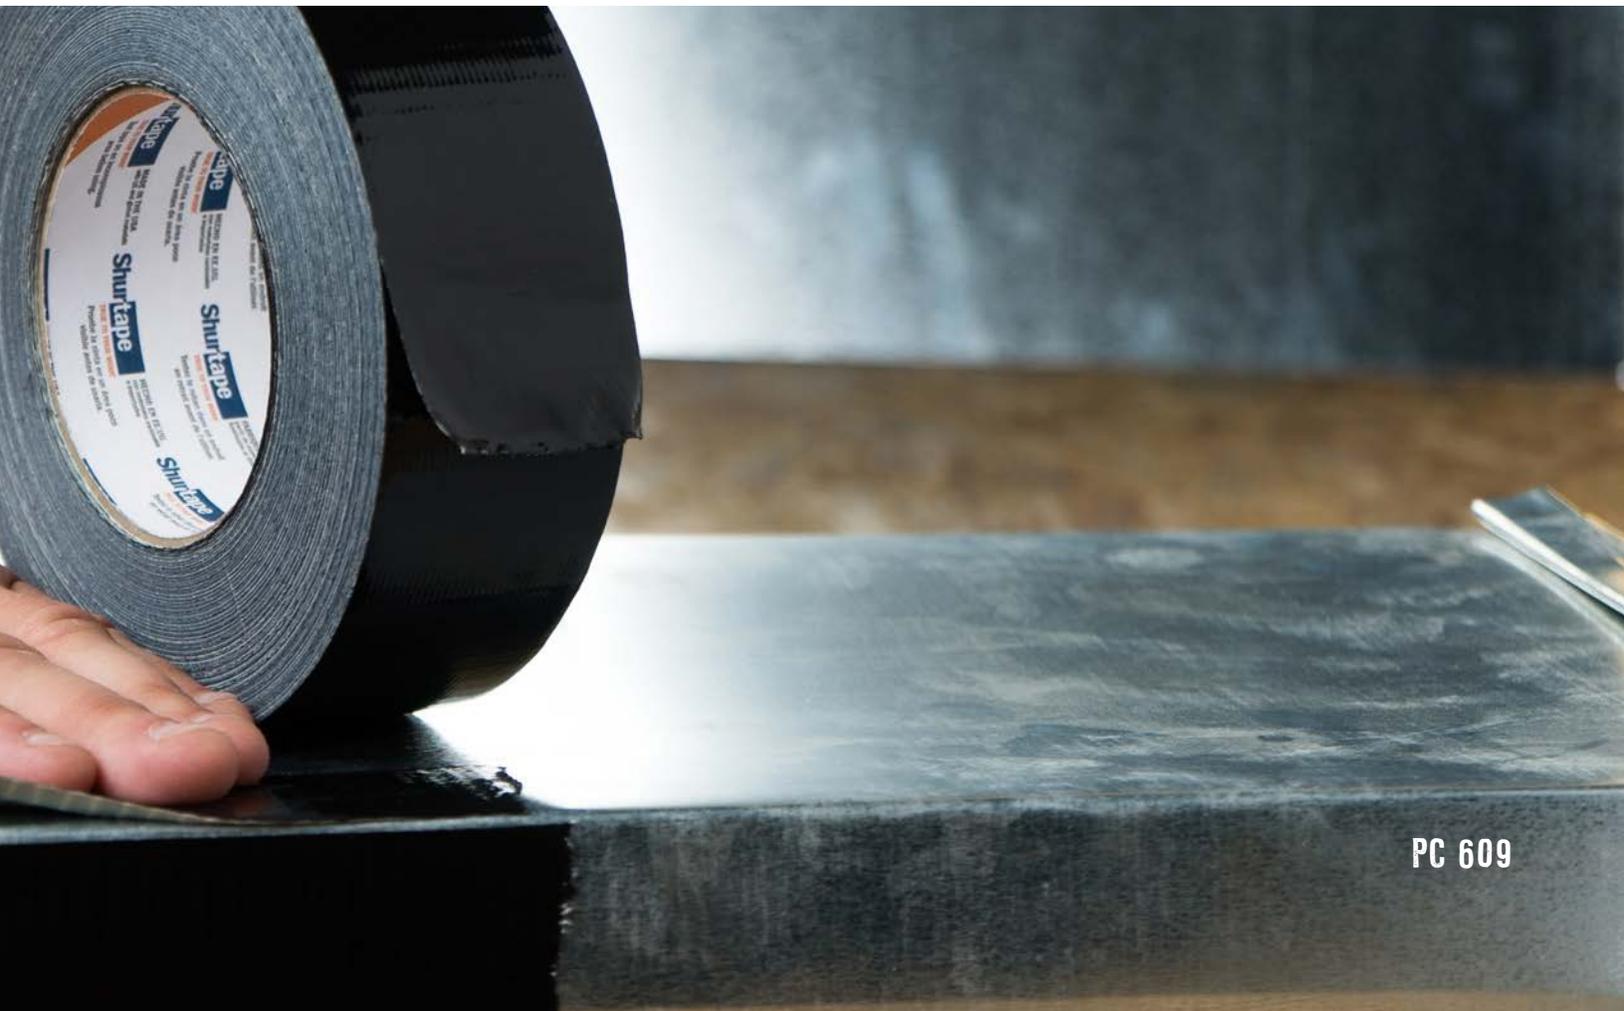

## HEAVY DUTY DUCT TAPES

## PC 621



**PROFESSIONAL GRADE  
EXCELLENT CONFORMABILITY  
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
<b>THICKNESS (MILS)</b>	<b>11.0</b>
ELONGATION (%)	15
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	37, 52

For demanding HVAC applications to hold, seal and seam sheet metal and flex duct, exhaust vents and pre-formed insulation; Can also be used in industrial applications for holding, splicing, protecting and packaging.



## PC 721



**EXTREME HOLD PROFESSIONAL GRADE  
EXCELLENT CONFORMABILITY  
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
<b>THICKNESS (MILS)</b>	<b>11.5</b>
ELONGATION (%)	24
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	37, 52

For demanding HVAC applications to hold, seal and seam sheet metal; Can also be used for heavy duty industrial applications like holding, bundling, splicing, protecting and packaging.



## PC 657®



**HEAVY DUTY PROFESSIONAL GRADE  
EXCELLENT HOLD  
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	45
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	100
<b>THICKNESS (MILS)</b>	<b>14.5</b>
ELONGATION (%)	14
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	43, 52

For use in high performance motorsports applications, pre-manufactured housing and RV assembly, critical industrial applications and for protection during sandblasting and metal-peening operations.



## PC 658



**SUPER BOTTOM BOARD  
SUPERIOR ADHESION AND HOLD  
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	45
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	125
<b>THICKNESS (MILS)</b>	<b>17.0</b>
ELONGATION (%)	14
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	40, 52

For seaming and sealing bottom board materials in pre-manufactured housing and RV assembly, set-up and maintenance; Can also be used to protect surfaces in metal-peening operations.



## PC 745



**T-REX® SUPER-TOUGH, ALL-WEATHER  
QUICK STICK  
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	100
<b>THICKNESS (MILS)</b>	<b>17.0</b>
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	-

For use on rough or dirty surfaces; For heavy duty repairs that demand a ferociously strong hold; Can also be used as a bottom board tape in the manufactured housing industry.



## PC 945



**T-REX® BRUTE FORCE  
SUPER-TOUGH, ALL-WEATHER  
NATURAL RUBBER ADHESIVE  
HOLD MORE, DO MORE™**

TENSILE (LBS/IN WIDTH)	250
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	65
<b>THICKNESS (MILS)</b>	<b>17.0</b>
ELONGATION (%)	21
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	-

For the most extreme applications such as securing, hauling, binding, repairing, holding and more. Can be used as an alternative to ropes and chains in many applications.



## SPECIALTY DUCT TAPES

### PC 623



**ECONOMICAL NUCLEAR GRADE  
EXCELLENT HOLDING POWER  
NATURAL RUBBER ADHESIVE  
MEETS ASME NQA-1 GUIDELINES**

TENSILE (LBS/IN WIDTH)	28
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS (MILS)	11.5
ELONGATION (%)	12
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	2, 3, 47

For a variety of purposes in the construction, operation and maintenance of nuclear power facilities; Can also be used for holding to stainless steel pipes, color-coding and sealing endcaps on stainless steel pipes.



### PC 624



**NUCLEAR GRADE  
EXCELLENT HOLDING POWER  
NATURAL RUBBER ADHESIVE  
MEETS ASME NQA-1 GUIDELINES**

TENSILE (LBS/IN WIDTH)	45
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
THICKNESS (MILS)	13.0
ELONGATION (%)	12
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	2, 3, 47

For a more robust variety of purposes in the construction, operation and maintenance of nuclear power facilities; Can also be used for holding to stainless steel pipes, color-coding and sealing endcaps on stainless steel pipes.



### PC 625



**MILITARY SPEC LUSTERLESS  
EXCELLENT HOLDING POWER  
NATURAL RUBBER ADHESIVE  
ASTM D5486M TESTED**

TENSILE (LBS/IN WIDTH)	45
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS (MILS)	12.5
ELONGATION (%)	12
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	13

For use as a premium, waterproof packaging tape that meets government specifications; Can also be used for moisture-proofing cartons, canisters and tubing.



T-REX® PC 745 & PC 945

## COATED CLOTH TAPES

**P- 628**

**PROFESSIONAL GRADE GAFFER'S  
MATTE-FINISH BACKING  
HIGH TENSILE AND HOLDING POWER  
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	75
<b>THICKNESS (MILS)</b>	<b>10.75</b>
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	-

For use in the convention, hospitality, exhibition and trade show industries, and for general use in the audio/visual, television, photography, theatrical and motion picture industries; Used for protection and book-binding, color-coding, labeling and stage marking; Also used in the HVAC industry.

**P- 660**

**PROFESSIONAL GRADE GAFFER'S  
MATTE-FINISH BACKING  
HIGH TENSILE AND HOLDING POWER  
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	75
<b>THICKNESS (MILS)</b>	<b>10.75</b>
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	-

For bundling or securing wires, cables and props in the audio/visual, television, photography, theatrical and motion picture industries; Also used for color-coding, labeling, marking and book-binding applications; Will fluoresce under black light.

**P- 661**

**GLOW-IN-THE-DARK GAFFER'S  
WRITABLE/PRINTABLE  
HIGH ADHESION AND TACK  
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
<b>THICKNESS (MILS)</b>	<b>13.0</b>
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	5, 18

Used for a multitude of applications, including safety marking, in the audio/visual, television, photography, theatrical and motion picture industries; Also used for labeling and marking various objects, such as: safety/critical equipment, exit/directional signage, tripping hazards, access handles, sports equipment and tools.

**P- 672**

**PREMIUM GRADE GAFFER'S  
LIGHT DUTY  
MATTE-FINISH BACKING  
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	70
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	77
<b>THICKNESS (MILS)</b>	<b>12.0</b>
ELONGATION (%)	6
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	21

For sealing containers and protection from welding splatter; Can also be used for general holding, bundling and temporary repair applications.

**P- 691**

**PREMIUM GRADE GAFFER'S  
MEDIUM DUTY  
MATTE-FINISH BACKING  
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	70
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
<b>THICKNESS (MILS)</b>	<b>12.25</b>
ELONGATION (%)	6
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	21, 46

For sealing containers and rooms, abrasion protection, and general holding, bundling and repair applications; Meets water leachable requirements for detrimental elements (Fl & Br <250PPM; S & C <500PPM) in accordance with MIL-STD-2041D.

**P- 665**

**PROFESSIONAL GRADE GAFFER'S  
MATTE-FINISH BACKING  
HIGH ADHESION AND TACK  
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS (MILS)	11.5
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	21

For demanding applications that require clean removal in the audio/visual, television, photography, theatrical and motion picture industries, such as holding wiring, lighting and props.

**P- 665W**

**PROFESSIONAL GRADE GAFFER'S  
WATER-RESISTANT MATTE-FINISH BACKING  
HIGH ADHESION AND TACK  
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS (MILS)	11.5
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	21

For demanding applications that require clean removal and water resistance in the audio/visual, television, photography, theatrical and motion picture industries, such as holding wiring, lighting and props.

**SPECIALTY TAPE****FT 175**

**GENERAL PURPOSE FRICTION  
COTTON CLOTH GRIP BACKING  
GOOD ABRASION RESISTANCE  
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	46.4
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	-
THICKNESS (MILS)	12.0
ELONGATION (%)	5
SERVICE TEMPERATURE RANGE (°F)	15 - 176
APPLICABLE STANDARDS*	-

For insulating and wrapping electrical splices and connections; Protects wires and cables.

**P- 665**



# FOIL, FILM & FOAM TAPES



**WE KNOW** your reputation is on the line. That's why we offer a comprehensive assortment of foil, film and foam tapes that are engineered for performance in a range of jobs, from HVAC and insulation to electrical, safety marking and more. With options that meet the code, perform in the cold and deliver superior results, Shurtape has you covered with the tapes you need to ensure your work exceeds your **EXACTING STANDARDS.**

## ALUMINUM FOIL TAPES

## AF 099



**2-MIL DEAD-SOFT ALUMINUM FOIL  
FLEXIBLE AND EASY TO USE  
ACRYLIC-BASED ADHESIVE  
LINERED**

TENSILE (LBS/IN WIDTH)	33
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS WITHOUT LINER (MILS)	4.1
ELONGATION (%)	2
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	45, 50, 51, 52, 53

For joining and sealing joints, connections and seams on rigid fiberglass ductboard and flexible air duct.



## AF 100



**2-MIL DEAD-SOFT ALUMINUM FOIL  
FLEXIBLE AND EASY TO USE  
ACRYLIC-BASED ADHESIVE  
LINERED**

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS WITHOUT LINER (MILS)	4.2
ELONGATION (%)	2
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	45, 50, 51, 52, 53

For joining and sealing joints, connections and seams on rigid fiberglass ductboard and flexible air duct.

\*Also available with EasyPEEL® split liner technology as AF 100E.



## AF 914CT



**1.5-MIL ALUMINUM FOIL  
SUPERIOR STABILITY  
ACRYLIC-BASED ADHESIVE  
LINERED**

TENSILE (LBS/IN WIDTH)	18.5
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	48
THICKNESS WITHOUT LINER (MILS)	3.4
ELONGATION (%)	7
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	34, 52

For joining and sealing aluminum-backed and fibrous insulation and metal ductwork in temperatures ranging from -20 F to 260 F; Also used to repair metal and sheet metal.



AF 100

## AF 975CT



**2-MIL ALUMINUM FOIL  
SUPERIOR STABILITY  
ACRYLIC-BASED ADHESIVE  
LINERED**

TENSILE (LBS/IN WIDTH)	18
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	4.0
ELONGATION (%)	3
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	34, 52

For use in temperatures ranging from -20 F to 260 F when joining and sealing aluminum-backed or fibrous insulation and metal ductwork; Can also be used when repairing metal and sheet metal.



# ALUMINUM FOIL TAPES

## SF 685



**PRINTED SHURMASTIC® FOIL FORMS A PERMANENT BOND BUTYL RUBBER ADHESIVE LINERED**

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	255
THICKNESS (MILS)	17.0
ELONGATION (%)	560
SERVICE TEMPERATURE RANGE (°F)	-20 - 200
APPLICABLE STANDARDS*	44, 48, 49, 52

For indoor or outdoor use to seal Class 1 Flex Duct, sheet metal and duct wrap vapor barriers; Also approved for subgrade application on PVC-coated duct; Paintable with paint recommended for aluminum.



## SF 686



**UL PRINTED SHURMASTIC® FOIL INSTANT, WATER-RESISTANT GRIP BUTYL RUBBER ADHESIVE LINERED**

TENSILE (LBS/IN WIDTH)	23.8
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	111
THICKNESS (MILS)	17.0
ELONGATION (%)	-
SERVICE TEMPERATURE RANGE (°F)	-20 - 220
APPLICABLE STANDARDS*	48, 49, 51, 52, 53

For airtight and moisture-free sealing of Class 1 Flex Duct, sheet metal and duct wrap vapor barriers; Also approved for subgrade application on PVC-coated duct; Paintable with paint recommended for aluminum.



## DC 181



**UL PRINTED BOPP FILM EXCELLENT CONFORMABILITY ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	31
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	38
THICKNESS (MILS)	2.7
ELONGATION (%)	200
SERVICE TEMPERATURE RANGE (°F)	-10 - 210
APPLICABLE STANDARDS*	45, 51, 52, 53

For use on Class 1 Flex Duct for connecting, joining, sealing and patching flexible air ductwork.



## FF 100



**UL PRINTED BOPP FILM EXCELLENT CONFORMABILITY WATER-BASED ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS (MILS)	3.0
ELONGATION (%)	150
SERVICE TEMPERATURE RANGE (°F)	14 - 176
APPLICABLE STANDARDS*	34, 51, 52, 53

For seaming and sealing reflective insulation; Can also be used to seal reflective insulation used as a radiant barrier inside an attic, crawlspace, side wall or other area inside a home or building; Delivers a permanent, airtight seal for the life of the system.



FF 100

## ELECTRICAL TAPES

## EV 57B



**GENERAL PURPOSE GRADE  
UL LISTED ELECTRICAL  
CONFORMABLE AND HAND-TEARABLE  
PVC FILM**

TENSILE (LBS/IN WIDTH)	16
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	24
THICKNESS (MILS)	7.0
ELONGATION (%)	250
SERVICE TEMPERATURE RANGE (°F)	32 - 176
APPLICABLE STANDARDS*	27, 53

For use in a variety of indoor/outdoor mechanical and electrical applications.



## EV 77B



**PROFESSIONAL GRADE  
UL LISTED ELECTRICAL  
HIGH TENSILE  
PVC FILM**

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	28
THICKNESS (MILS)	7.0
ELONGATION (%)	300
SERVICE TEMPERATURE RANGE (°F)	0 - 220
APPLICABLE STANDARDS*	27, 53

For all-weather insulating and splicing applications and jacketing on high voltage splices and repairs.



## EV 97B



**PREMIUM GRADE  
UL LISTED ELECTRICAL  
HIGH TENSILE  
PVC FILM**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	28
THICKNESS (MILS)	8.5
ELONGATION (%)	300
SERVICE TEMPERATURE RANGE (°F)	0 - 220
APPLICABLE STANDARDS*	27, 53

For primary insulation of electrical splices up to 600 V; Also used as a jacketing on high voltage splices and repairs; Can be used when wrapping wire harnesses and cables.



## EV 57C



**GENERAL PURPOSE GRADE  
UL LISTED ELECTRICAL  
CONFORMABLE AND HAND-TEARABLE  
PVC FILM**

TENSILE (LBS/IN WIDTH)	16
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	24
THICKNESS (MILS)	7.0
ELONGATION (%)	250
SERVICE TEMPERATURE RANGE (°F)	32 - 176
APPLICABLE STANDARDS*	27, 53

For use in a variety of indoor/outdoor mechanical and electrical applications, including color-coding and phasing tasks.



## EV 77C



**PROFESSIONAL GRADE  
UL LISTED ELECTRICAL  
HIGH TENSILE  
PVC FILM**

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	28
THICKNESS (MILS)	7.0
ELONGATION (%)	300
SERVICE TEMPERATURE RANGE (°F)	0 - 220
APPLICABLE STANDARDS*	27, 53

For all-weather insulating and splicing applications, jacketing on high voltage splices and repairs, and color-coding and phasing tasks.



## LR 117



**HIGH VOLTAGE  
HIGH ELONGATION  
LINERLESS EPR**

TENSILE (PSI)	400
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	-
THICKNESS (MILS)	30.0
ELONGATION (%)	760
CONTINUOUS OPERATING TEMPERATURE MAX (°F)	194
APPLICABLE STANDARDS*	6, 7, 15

For insulating splices and terminations up to 69,000 V; Also used for insulating and protecting bus bars up to 35,000 V; Can be used to seal electrical splices from moisture; Also for jacketing for applications greater than 69,000 V; Compatible with all extruded dielectric cable insulations.





Shurtape electrical tapes are engineered for durability, strength and consistent performance in a range of electrical and mechanical applications. Whether for primary insulation, as a jacketing or for phasing, you can be confident these tapes will meet the demands of the job.

Learn more at [www.shurtape.com/electrical-tapes](http://www.shurtape.com/electrical-tapes)

## POLYETHYLENE/PVC FILM TAPES

### BT 100



**GENERAL PURPOSE BARRICADE**  
**2-IN LETTERS ARE EASY TO READ**  
**RESISTS SAGGING**  
**ADHESIVE-FREE**

THICKNESS (MILS) 2.0 - 3.0  
 APPLICABLE STANDARDS\* -

For marking restricted areas and managing access to work sites by professionals in the safety, construction, utilities, hardware and other industries.

\*Wet Paint and Hazard available in bilingual print (English/Spanish).

### BT 200



**WOVEN BARRICADE**  
**RESISTS SAGGING**  
**REUSABLE**  
**ADHESIVE-FREE**

TENSILE (LBS/IN WIDTH) 500  
 THICKNESS (MILS) 27  
 ELONGATION (%) 35  
 APPLICABLE STANDARDS\* -

For marking restricted areas and managing access to work sites by professionals in the safety, construction, utilities, hardware and other industries; Ideal for indoor and outdoor use.

### FM 200



**CONTRACTOR GRADE FLAGGING**  
**EASY TO TEAR AND TIE**  
**HIGH VISIBILITY**  
**ADHESIVE-FREE**

REGULAR COLORS THICKNESS (MILS) 2.0  
 FLUORESCENT COLORS THICKNESS (MILS) 4.0  
 APPLICABLE STANDARDS\* -

For color-coding, tagging and marking applications; Can be used for marking survey boundaries, cables and pipes, roping off areas and marking hazards; Also good for trail marking.

### VP 410



**GENERAL PURPOSE GRADE**  
**LINE SET**  
**SPVC FILM**

TENSILE (LBS/IN WIDTH) 13  
 ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) 20  
 THICKNESS (MILS) 5.25  
 ELONGATION (%) 200  
 SERVICE TEMPERATURE RANGE (°F) 20 - 140  
 APPLICABLE STANDARDS\* 23

For floor, lane and aisle marking, color-coding and identification applications; Also used in the HVAC industry to wrap line sets, seam Rubatex and Armaflex, and insulate air ducts and underground pipes; Meets OSHA color-coding requirements.




### VP 415



**GENERAL PURPOSE GRADE**  
**WARNING STRIPE**  
**SPVC FILM**

TENSILE (LBS/IN WIDTH) 15  
 ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) 12  
 THICKNESS (MILS) 6.6  
 ELONGATION (%) 200  
 SERVICE TEMPERATURE RANGE (°F) 20 - 140  
 APPLICABLE STANDARDS\* 23

For lane marking and identification of safety zones and hazard areas; Resistant to abrasion, UV light, acid, alkalides, oils, moisture, humidity and corrosion; Meets OSHA requirements for hazard markings.

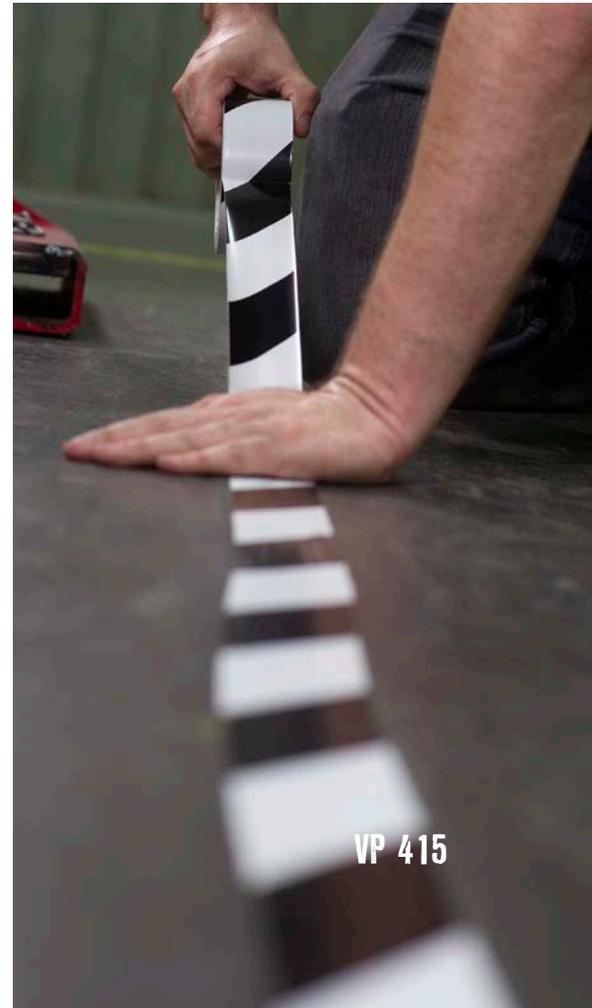

VP 415

**PE 100**



**FLOORMATE®  
LOW ADHESION  
ACRYLIC-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	11
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	15
THICKNESS (MILS)	4.6
ELONGATION (%)	500
MAXIMUM SERVICE TEMPERATURE (°F)	160
APPLICABLE STANDARDS*	-

For temporary use on properly prepared and cured wood floors; Also used as a gym floor marking tape for creating temporary lines and boundaries; Can also be used on other hard flooring surfaces, including sheet vinyl, wood laminates, engineered hardwood, tile, marble and granite.

**PW 100**



**GENERAL PURPOSE GRADE  
PVC PIPE WRAP  
CORROSION/MOISTURE RESISTANT  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	20
THICKNESS (MILS)	10.0
ELONGATION (%)	200
APPLICATION TEMPERATURE RANGE (°F)	14 - 176
SERVICE TEMPERATURE RANGE (°F)	32 - 104
APPLICABLE STANDARDS*	-

For corrosion protection of under and above ground metal and plastic pipe installations.

**PE 333**



**POLYETHYLENE FILM  
SERRATED OR STRAIGHT EDGE  
MAINTAINS A WATERTIGHT SEAL  
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	7.0
ELONGATION (%)	80
SERVICE TEMPERATURE RANGE (°F)	32 - 160
APPLICABLE STANDARDS*	-

For masking surfaces, such as windows and doors, during stucco application and painting when UV resistance is not required; Also for masking curved surfaces; Used for seaming under slab vapor barriers; Also used in the abatement, restoration and remodeling industries to hold poly-sheeting when building containments.

**PE 444**



**POLYETHYLENE FILM  
MAINTAINS A WATERTIGHT SEAL  
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS (MILS)	7.0
ELONGATION (%)	76
SERVICE TEMPERATURE RANGE (°F)	32 - 160
APPLICABLE STANDARDS*	-

For masking surfaces, such as windows and doors, during stucco application and painting; Delivers residue-free removal for a variety of applications.

**PE 555**



**POLYETHYLENE FILM  
EXCELLENT TEARABILITY  
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	92
THICKNESS (MILS)	9.0
ELONGATION (%)	94
SERVICE TEMPERATURE RANGE (°F)	32 - 160
APPLICABLE STANDARDS*	-

For masking surfaces during stucco application and painting; Can also be used for surface protection, color-coding, splicing and seaming on pipe-fitting covers; Delivers residue-free removal for a variety of applications.



\* SEE PAGE 52 FOR APPLICABLE STANDARDS

## COMPOSITE TAPES

**AF 984CT**

**FOIL/SCRIM/KRAFT (FSK)  
SUPERIOR STABILITY  
ACRYLIC-BASED ADHESIVE  
LINERED**

TENSILE (LBS/IN WIDTH)	34
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	7.4
ELONGATION (%)	3
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	36, 52

For sealing seams in scrim-reinforced duct insulation.

**AF 990CT**

**ALL SERVICE JACKET (ASJ)  
SUPERIOR STABILITY  
ACRYLIC-BASED ADHESIVE  
LINERED**

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS WITHOUT LINER (MILS)	8.3
ELONGATION (%)	6.7
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	36, 52

For use in cold and dual temperature systems to seal, seam and join scrim-reinforced pipe and duct insulation.

**AF 995CT**

**ALL SERVICE JACKET+ (ASJ+)  
SUPERIOR STABILITY  
ACRYLIC-BASED ADHESIVE  
LINERED**

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS WITHOUT LINER (MILS)	8.3
ELONGATION (%)	6.7
SERVICE TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	52

For permanently sealing butt joints on ductboard and pipe insulation wrapped with ASJ+ faced backing in temperatures ranging from -20 F to 260 F.



COLD TEMP



COLD TEMP



COLD TEMP

**MB 100CT**

**WHITE METALIZED POLYPROPYLENE  
PERMANENT BOND  
ACRYLIC ADHESIVE  
LINERED**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	37
THICKNESS WITHOUT LINER (MILS)	6.9
ELONGATION (%)	5
SERVICE TEMPERATURE RANGE (°F)	-20 - 220
APPLICABLE STANDARDS*	52

For seaming and sealing VR-R plus insulation backings; Offers a seamless match when sealing, seaming and joining metal building insulation.

**MB 200CT**

**WHITE METALIZED POLYPROPYLENE  
PERMANENT BOND  
ACRYLIC ADHESIVE  
LINERED**

TENSILE (LBS/IN WIDTH)	37
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	6.7
ELONGATION (%)	5
SERVICE TEMPERATURE RANGE (°F)	-20 - 220
APPLICABLE STANDARDS*	52

For medium duty seaming and sealing White Metalized Polypropylene insulation backings; Offers a seamless match when sealing, seaming and joining metal building insulation.

**MB 300CT**

**WHITE METALIZED POLYPROPYLENE  
PERMANENT BOND  
ACRYLIC ADHESIVE  
LINERED**

TENSILE (LBS/IN WIDTH)	41
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	8.3
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	-20 - 220
APPLICABLE STANDARDS*	52

For heavy duty seaming and sealing White Metalized Polypropylene insulation backings; Offers a seamless match when sealing, seaming and joining metal building insulation.



COLD TEMP



COLD TEMP



COLD TEMP

## SPECIALTY TAPES

### RT 700



**T-REX® CLEAR REPAIR TAPE**  
**HAND-TEARABLE**  
**ALL-WEATHER**  
**SOLVENT ACRYLIC-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	23.5
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	100
HOLDING POWER TO STEEL (MINUTES)	1,800+
THICKNESS (MILS)	6.8
ELONGATION (%)	430
SERVICE TEMPERATURE RANGE (°F)	-5 - 150
APPLICABLE STANDARDS*	-

For quick and discreet repairs to a variety of surfaces, including those that require a water-resistant seal; Can be applied to wet\* or dry surfaces; Can also be applied to rough surfaces and at below freezing temperatures.



\*Follow recommended usage instructions for best results in wet-stick applications.



### HW 300



**HOUSEWRAP/SHEATHING**  
**HAND-TEARABLE**  
**WATER-BASED ACRYLIC ADHESIVE**  
**CCMC-CERTIFIED**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS (MILS)	3.0
ELONGATION (%)	162
SERVICE TEMPERATURE RANGE (°F)	14 - 176
APPLICABLE STANDARDS*	19, 34, 52

For sealing seams on all types of housewrap, sheathing, insulation and vapor barrier materials used in residential and commercial construction applications.



### LS 300



**UV-RESISTANT LINE SET**  
**EASY TO UNWIND**  
**ACRYLIC-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	37
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	35
THICKNESS (MILS)	2.85
ELONGATION (%)	180
SERVICE TEMPERATURE RANGE (°F)	-35 - 210
APPLICABLE STANDARDS*	-

For taping outdoor HVAC components.





# DOUBLE-COATED TAPES



**WE KNOW** you demand versatility to get the job done. That's why we have engineered a comprehensive assortment of double-coated tapes, including paper, film, cloth and transfer adhesive options. Whether you're mounting, splicing, joining or laminating, these tapes have one thing in common: an unsurpassed level of **QUALITY**.

## DOUBLE-COATED PAPER TAPES

### DF 63



#### GENERAL PURPOSE GRADE CREPE PAPER RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	25
THICKNESS WITHOUT LINER (MILS)	6.5
ELONGATION (%)	8
SERVICE TEMPERATURE RANGE (°F)	50 - 150
APPLICABLE STANDARDS*	25

For mounting, holding, splicing, tabbing and fastening a variety of substrates.

### DF 65



#### GENERAL PURPOSE GRADE FLAT PAPER RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	33
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	65
THICKNESS WITHOUT LINER (MILS)	5.0
ELONGATION (%)	3
SERVICE TEMPERATURE RANGE (°F)	50 - 225
APPLICABLE STANDARDS*	26

For mounting, holding, splicing, tabbing and fastening applications that demand aggressive adhesion.

### DT 200



#### PREMIUM PERFORMANCE GRADE SOLVENT-BASED ACRYLIC ADHESIVE NONWOVEN TISSUE

TENSILE (LBS/IN WIDTH)	4.6
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS WITHOUT LINER (MILS)	4.5
ELONGATION (%)	3.5
SERVICE TEMPERATURE RANGE (°F)	-20 - 212
APPLICABLE STANDARDS*	-

For high-speed splicing in the corrugated cardboard production process in temperatures up to 400 F; Can also be used as a mounting and laminating system for irregularly shaped metals, foams, foils and nameplates; For manual applications.

### GG 200



#### GOLF GRIP RUBBER-BASED ADHESIVE CREPE PAPER

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS WITHOUT LINER (MILS)	6.5
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	50 - 150
APPLICABLE STANDARDS*	-

For factory and clubhouse golf grip installation; Can also be used for mounting, holding, splicing, tabbing and fastening a variety of substrates when an aggressive, double-sided tape is required.

### DS 154




#### PROFESSIONAL GRADE CONTAINMENT EXCELLENT HOLD FINE STRUCTURED CREPE (FSC) SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (LS <sup>^</sup> )	60
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (ES <sup>^</sup> )	27
THICKNESS WITHOUT LINER (MILS)	8.5
ELONGATION (%)	9
SERVICE TEMPERATURE RANGE (°F)	32 - 120
APPLICABLE STANDARDS*	-

For holding poly-sheeting and other protective materials when creating high-performance containment systems; Use for restoration, abatement and remodeling tasks such as painting, cleaning, sanding, mold remediation, asbestos removal and more.



<sup>^</sup>LS=LINER SIDE; <sup>^</sup>ES=EXPOSED SIDE

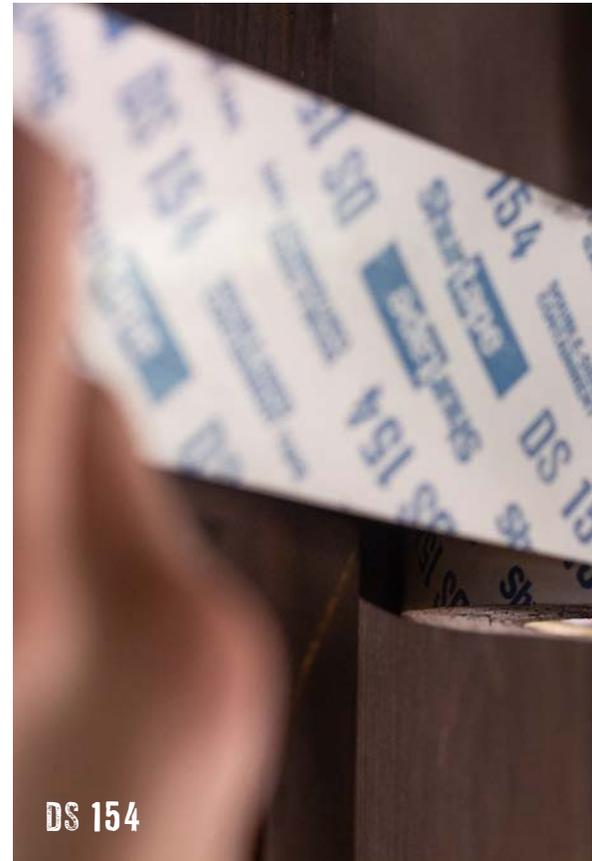

DS 154

## DOUBLE-COATED FILM TAPES

### DP 380



**GENERAL PURPOSE GRADE  
POLYESTER (PET) FILM  
SOLVENT-BASED ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	14.3
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
THICKNESS WITHOUT LINER (MILS)	4.4
ELONGATION (%)	120
SERVICE TEMPERATURE RANGE (°F)	-20 - 257
APPLICABLE STANDARDS*	-

For mounting banners, light signs, window blinds, emblems and nameplates; Also used for long-term or permanent bonding and attachment applications, including POP displays and laminating materials.

### DP 401



**PROFESSIONAL GRADE  
POLYESTER (PET) FILM  
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	14
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (LS <sup>^</sup> )	124
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (ES <sup>^</sup> )	142
THICKNESS WITHOUT LINER (MILS)	4.7
ELONGATION (%)	120
SERVICE TEMPERATURE RANGE (°F)	32 - 150
APPLICABLE STANDARDS*	-

For polyethylene (PE) foam fabrication and lamination processes; Ideal for packaging applications that require cushioning, protection or stabilization of contents; Can also be used with die-cuts, gaskets, POP merchandising and shelf displays.

<sup>^</sup>LS=LINER SIDE; <sup>^</sup>ES=EXPOSED SIDE

## DOUBLE-COATED CLOTH TAPES

### DF 545



**PREMIUM PERFORMANCE GRADE  
POLYESTER/COTTON BLEND CLOTH  
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	52
THICKNESS WITHOUT LINER (MILS)	10.5
ELONGATION (%)	8
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	5

For securing carpet and pad at convention centers, arenas and hotels; Also used for general purpose hanging applications in the construction and abatement industries; Can also be used for splicing applications.



### DP 391



**PROFESSIONAL GRADE  
POLYESTER (PET) FILM  
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	82
THICKNESS WITHOUT LINER (MILS)	3.7
ELONGATION (%)	120
SERVICE TEMPERATURE RANGE (°F)	32 - 150
APPLICABLE STANDARDS*	-

For mounting, bonding and fastening a wide variety of substrates, including low surface energy plastics and coatings; Used for trim, profile and extrusion mounting; Can be used in non-direct UV exposure applications, such as vinyl and painted window frames, that demand clean removal; Also used for mounting indoor window kits.

### DF 642



**INDUSTRIAL GRADE  
POLYESTER/COTTON BLEND CLOTH  
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	32
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32
THICKNESS WITHOUT LINER (MILS)	12.0
ELONGATION (%)	8
SERVICE TEMPERATURE RANGE (°F)	50 - 225
APPLICABLE STANDARDS*	-

For carpet and pad installation at convention centers, arenas and hotels; Used for general purpose holding and mounting applications; Can also be used to hold signs and dispensers for POP merchandising.

## TRANSFER ADHESIVE TAPES

## TA 450



**GENERAL PURPOSE GRADE  
RESISTS HUMIDITY, MOST SOLVENTS  
ACRYLIC-BASED ADHESIVE**

ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	25
THICKNESS WITHOUT LINER (MILS)	1.6
SERVICE TEMPERATURE RANGE (°F)	-22 - 302
APPLICABLE STANDARDS*	-

For mounting, holding, joining and splicing various substrates, including paper, cardboard, textiles, plastics, leather, wood, glass and painted surfaces; For use on displays, POS, posters, etc.



## TG 356



**PREMIUM PERFORMANCE GRADE  
RESISTS HUMIDITY, MOST SOLVENTS  
ACRYLIC-BASED ADHESIVE**

ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32
THICKNESS WITHOUT LINER (MILS)	2.0
SERVICE TEMPERATURE RANGE (°F)	-60 - 250
APPLICABLE STANDARDS*	-

For mounting, holding, joining and splicing various substrates, including paper, cardboard, textiles, plastics, leather, wood, glass and painted surfaces; For use on displays, POS, posters, etc.; Use with an adhesive transfer gun to make almost any surface self-adhesive. Reverse wound on a 1-in I.D. core.



## DISPENSER


## SD 950



**ADHESIVE TRANSFER GUN  
PISTOL-GRIP  
EASY TO LOAD**

For use with reverse wound adhesive transfer tape to quickly and easily make almost any surface self-adhesive; For mounting, holding, joining and splicing paper, cardboard, plastics, wood, leather, glass and painted surfaces; Can also be used when gift wrapping; For use with 0.75 in maximum width rolls.

**RECOMMENDED PRODUCTS**  
TG 356

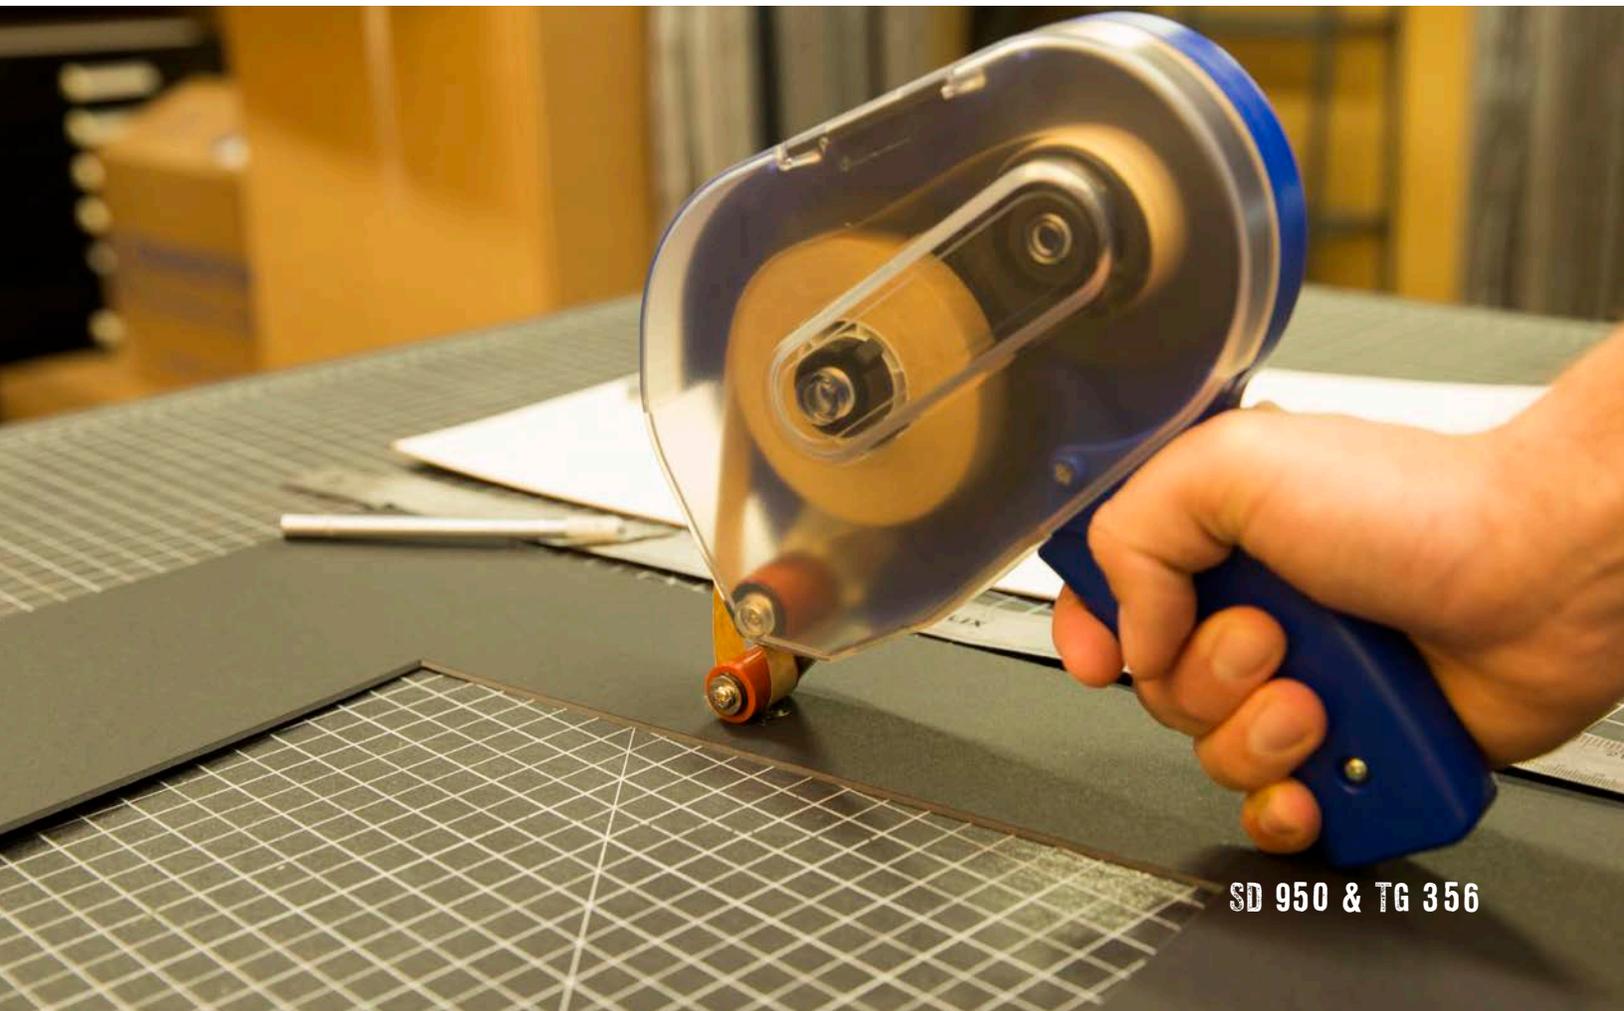

**SD 950 & TG 356**

# SHURTAPE INNOVATIONS

New or reinvented products that stay **TRUE TO YOUR WORK**

**PC 6**  
ECONOMY GRADE DUCT TAPE



Page 26

**PC 7**  
UTILITY GRADE DUCT TAPE



Page 26

**PC 8**  
GENERAL PURPOSE DUCT TAPE



Page 26

**PC 9**  
CONTRACTOR GRADE DUCT TAPE



Page 26

**PC 945**  
T-REX® BRUTE FORCE SUPER-TOUGH TAPE



Page 32

**FT 175**  
SPECIALTY GENERAL PURPOSE TAPE



Page 35

**CP 130**  
FROGTAPE® PRO GRADE PAINTER'S TAPE



Page 4

**BT 100**  
GENERAL PURPOSE BARRICADE TAPE  
BILINGUAL



Page 42

**BT 200**  
WOVEN BARRICADE TAPE



Page 42

# APPLICABLE STANDARDS

1	AMS-T-21595	19	CCMC Report No.: 13401-R	37	FSI 5/SDI 5
2	ANSI No. 45.2.2	20	CID A-A-113D, Type I, Class A	38	FSI 5/SDI 10
3	ASME NQA-1	21	CID A-A-1586A	39	FSI 10/SDI 10
4	ASTM D 1974/D 1974M-16	22	CID A-A-1684C	40	FSI 15/SDI 20
5	ASTM D 4236	23	CID A-A-1689B, Type I, Class 2	41	FSI 15/SDI 25
6	ASTM D 4325	24	CID A-A-1689B, Type II	42	FSI 15/SDI 30
7	ASTM D 4388	25	CID A-A-180C, Type II, Grade A	43	FSI 15/SDI 40
8	ASTM D 5330, Type II	26	CID A-A-180C, Type II, Grade B	44	FSI 20/SDI 40
9	ASTM D 5479-17, Type I	27	CSA 22.2	45	FSI 25/SDI 50
10	ASTM D 5486M-12, Type I, Class 2	28	FDA Indirect Contact CFR 21, 174.5	46	MIL-STD-2041D
11	ASTM D 5486M-12, Type II, Class 2	29	FDA Indirect Contact CFR 21, 175.105	47	NRC Guide 1.38
12	ASTM D 5486M-12, Type III	30	FDA Indirect Contact CFR 21, 176.170	48	Pressure Classes SMACNA 1/2, 1, 2, 3, 4 & 6
13	ASTM D 5486M-12, Type IV	31	FDA Indirect Contact CFR 21, 176.180	49	Seal Classes A, B, C
14	ASTM D 5486M-12, Type V	32	FDA Indirect Contact CFR 21, 177.1520	50	UL 181A-P
15	ASTM D 570	33	FDA Indirect Contact CFR 21, 177.1630	51	UL 181B-FX
16	ASTM D 6123/D 6123M-97 (2012), Type I	34	FSI 0/SDI 0	52	UL 723
17	ASTM D 6123/D 6123M-97 (2012), Type II	35	FSI 0/SDI 5	53	UL Listed
18	ASTM E 2072	36	FSI 5/SDI 0		

# WARRANTY INFORMATION

Shurtape Technologies, LLC, guarantees its products to be in compliance with acceptable standards for material and workmanship, but limits its obligation under this warranty to replacement or, at its option, reimbursement of the purchase price of returned merchandise shown to its satisfaction to have been defective by such standards at the time it was shipped by Shurtape Technologies, LLC. Shurtape Technologies, LLC, neither makes nor authorizes, nor shall be bound to any other warranty of merchantability, and under no circumstances will it be liable for any loss, damage, expense or consequential damage or loss of any kind either in tort or contract, arising directly or indirectly out of or in connection with the use of or inability to use its products.

Product literature, specifications, product and test reports, and other descriptive and advertising material and information are based on research testing and are believed to be reliable but constitute no part of this warranty, which is exclusively and strictly limited to the foregoing. Shurtape products are sold on the understanding that the buyer has determined or will determine the suitability of the product for buyer's purposes, and is reminded that some materials are sensitive to adhesive-based products and discretion should be used in their application.

No agent or representative is authorized to give any guarantee or make any statement contrary to or inconsistent with this warranty.

All trademarks listed are the property of Shurtape Technologies, LLC, unless otherwise noted.  
Information included in this catalog is true at time of printing.

Want to learn more about our company, locations and brands?  
Visit us online at [ShurtapeTech.com](http://ShurtapeTech.com).

**Shurtape**  
TECHNOLOGIES

# PRODUCT INDEX

AF 099	38	CP 150	4	FM 200	42	HP 560	14	PC 619	28	SD 932	22
AF 100	38	CP 327	9	FP 17	9	HP 800	12	PC 621	32	SD 934	22
AF 100E	38	CP 400	7	FP 96	8	HP Custom Print	8	PC 622	29	SD 935	22
AF 914CT	38	CP 450	7	FP 97	8	HW 300	45	PC 623	33	SD 936	22
AF 975CT	38	CP 500	7	FP 115	8	JLAR	19	PC 624	33	SD 937	23
AF 984CT	44	CP 631	6	FP 202	8	LR 117	40	PC 625	33	SD 950	50
AF 990CT	44	CP 650	7	FP 227	9	LS 300	45	PC 657®	32	SD 955	23
AF 995CT	44	CP 743	9	FP 726	9	M-1	23	PC 658	32	SD 999	23
AP 15	19	CP 905	7	FT 36	22	MB 100CT	44	PC 667	29	SF 682	31
AP 101®	15	CT 109	19	FT 175	35	MB 200CT	44	PC 721	32	SF 683	31
AP 180®	15	DC 181	39	GG 200	48	MB 300CT	44	PC 745	32	SF 685	39
AP 201®	15	DF 63	48	GP 100	16	MJ 100	31	PC 857	30	SF 686	39
AP 301®	15	DF 65	48	GS 490	17	P- 628	34	PC 858CA	30	SP 5000	23
AP 401®	15	DF 545	49	GS 496	14	P- 660	34	PC 945	32	SP 7000	21
BT 100	42	DF 642	49	GS 500	17	P- 661	34	PE 100	43	SP 8000	21
BT 200	42	DP 380	49	GS 501	17	P- 665	35	PE 333	43	TA 450	50
CF 120	4	DP 391	49	GS 521	17	P- 665W	35	PE 444	43	TG 356	50
CF 160	4	DP 401	49	GS 531	17	P- 672	34	PE 555	43	VF 719	19
CF 740	7	DS 154	48	HP 100®	12	P- 691	34	PP 802	18	VP 410	42
COL 00	5	DT 200	48	HP 132®	13	PC 6	26	PP 803	18	VP 415	42
CP 27®	4	E-1	23	HP 200®	12	PC 7	26	PP 807	19	WP 100	16
CP 66®	5	EV 57B	40	HP 232®	13	PC 8	26	PP 808	19	WP 200	16
CP 83	6	EV 57C	40	HP 235	13	PC 9	26	PP 810	18	WP 300	16
CP 101	6	EV 77B	40	HP 240	14	PC 600C	27	PP 815	18	WP 400	16
CP 102	5	EV 77C	40	HP 260	14	PC 600S	27	PS 748	17	WP Custom Print	16
CP 105	6	EV 97B	40	HP 300®	12	PC 608	28	PW 100	43		
CP 106	6	FE-2	21	HP 400®	12	PC 609	30	RT 700	45		
CP 107	5	FE-3	21	HP 460	14	PC 618C	28	SD 930	23		
CP 130	4	FF 100	39	HP 500®	12	PC 618S	28	SD 931	23		





# Shurtape®

**TRUE TO YOUR WORK®**

**SHURTAPE TECHNOLOGIES, LLC  
PO BOX 1530  
HICKORY, NC 28603-1530 USA**

**SHURTAPE.COM  
1.888.442.TAPE  
CUSTSERVICE@SHURTAPE.COM**

**ISO 9001-CERTIFIED QUALITY SYSTEM**